

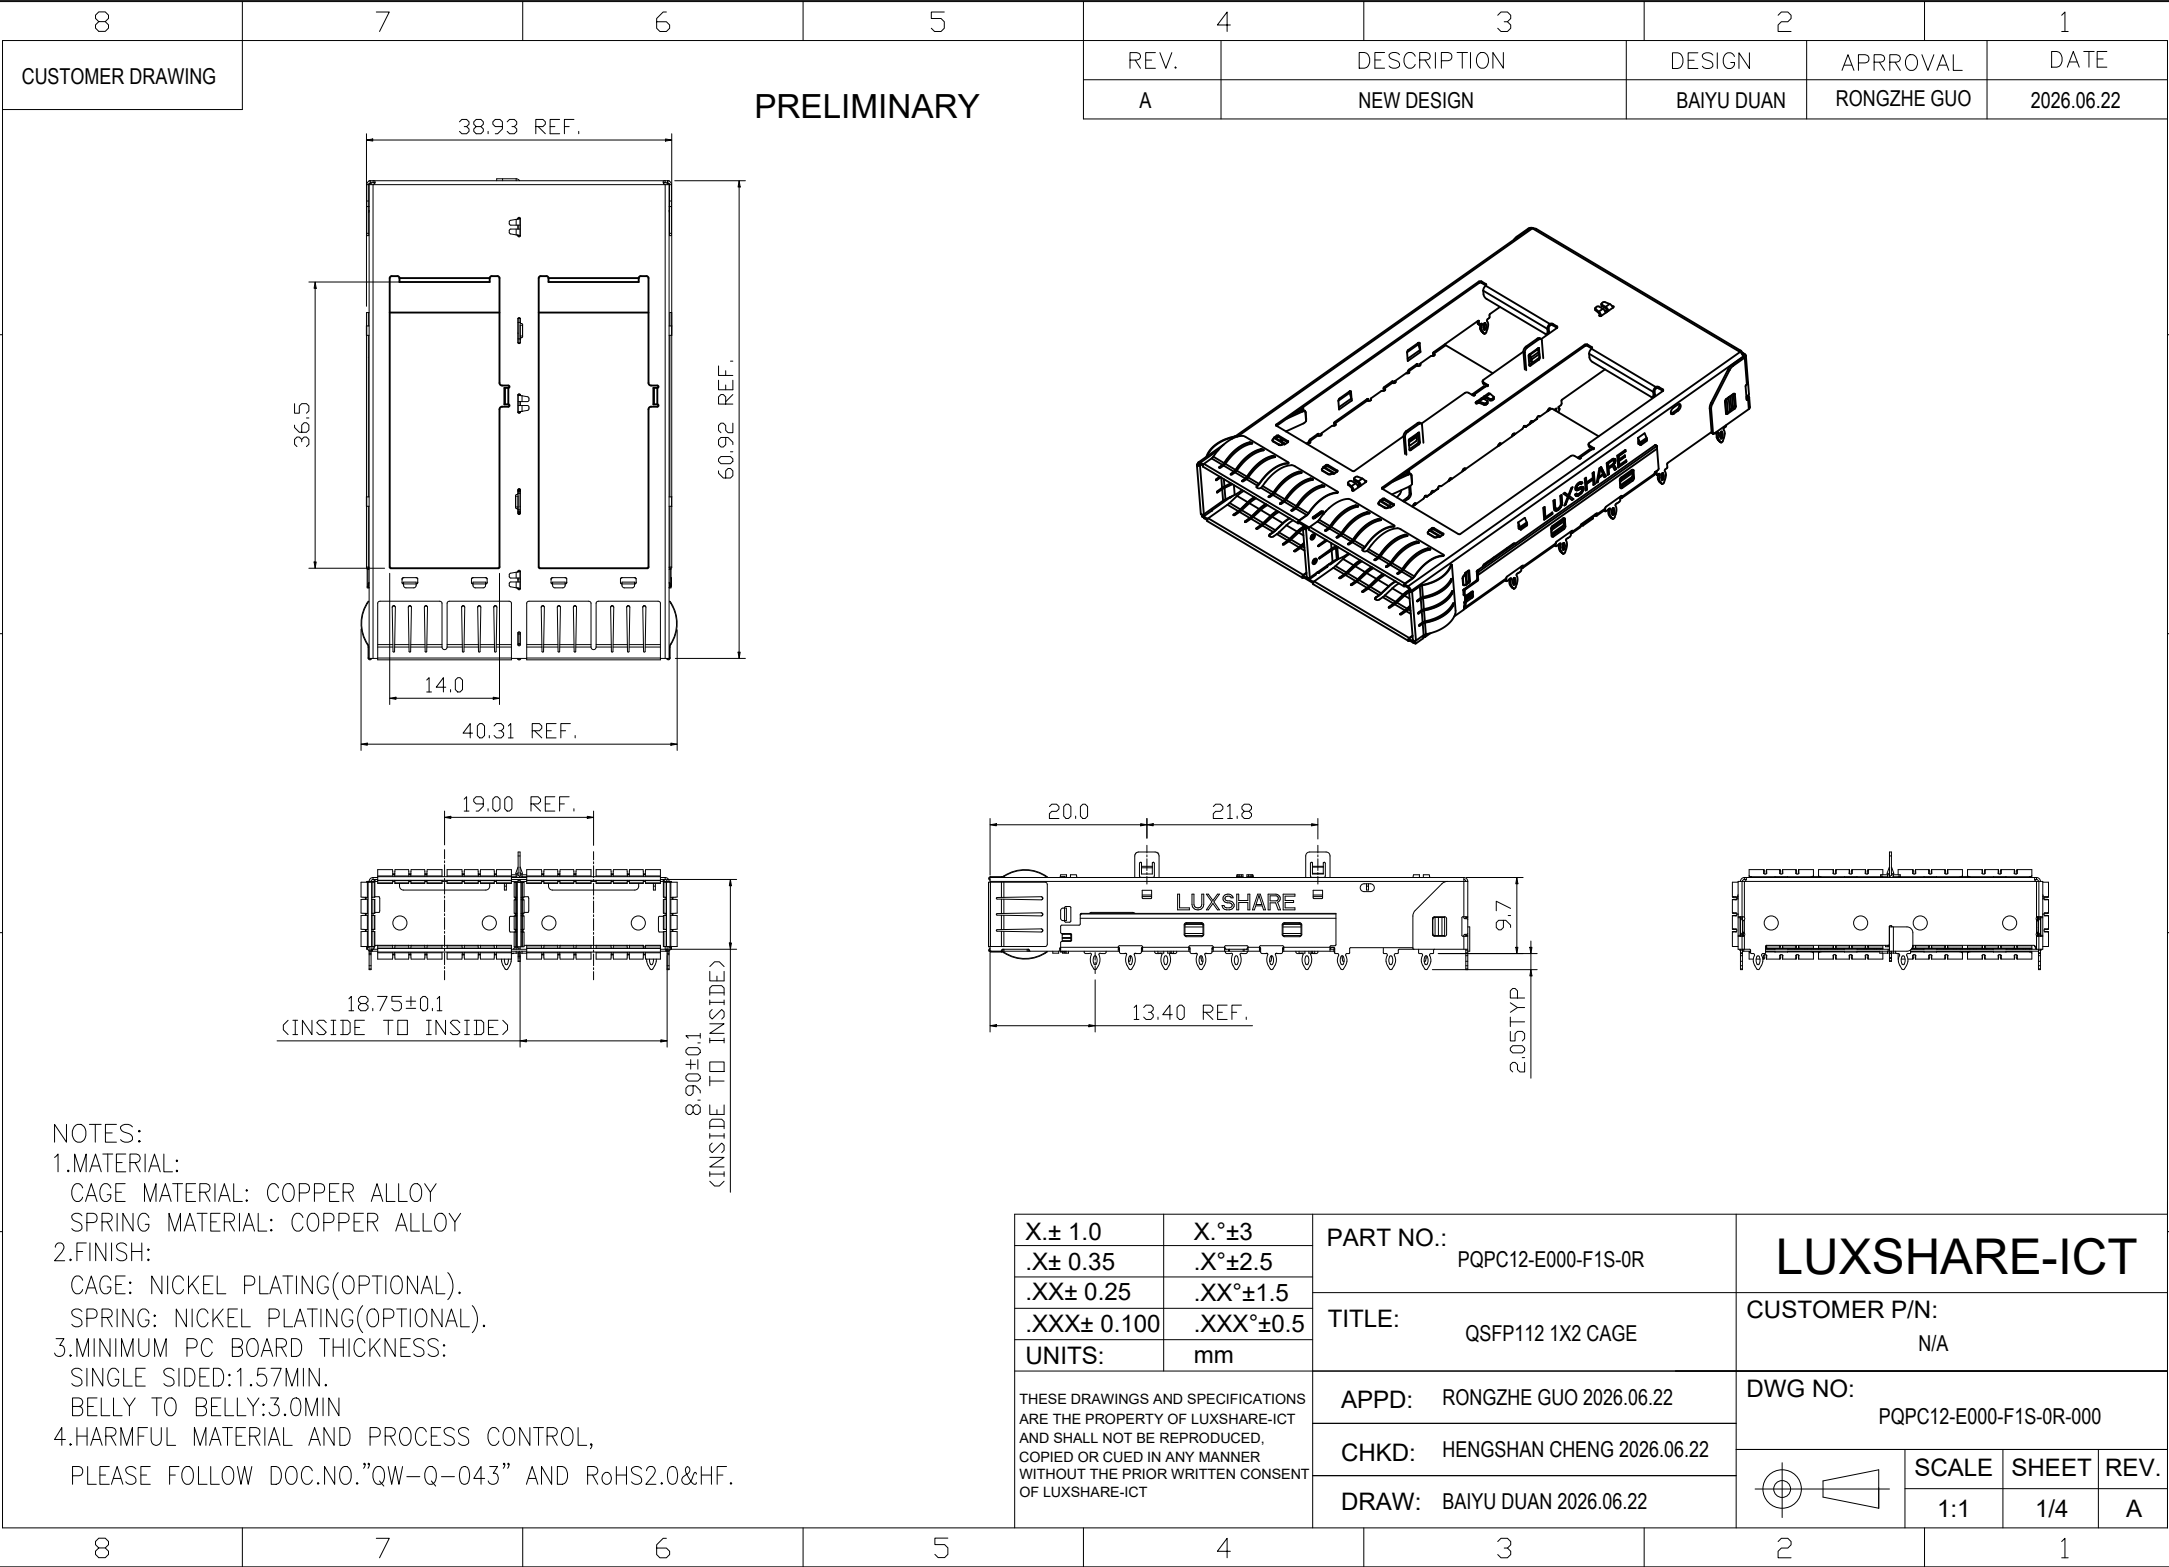


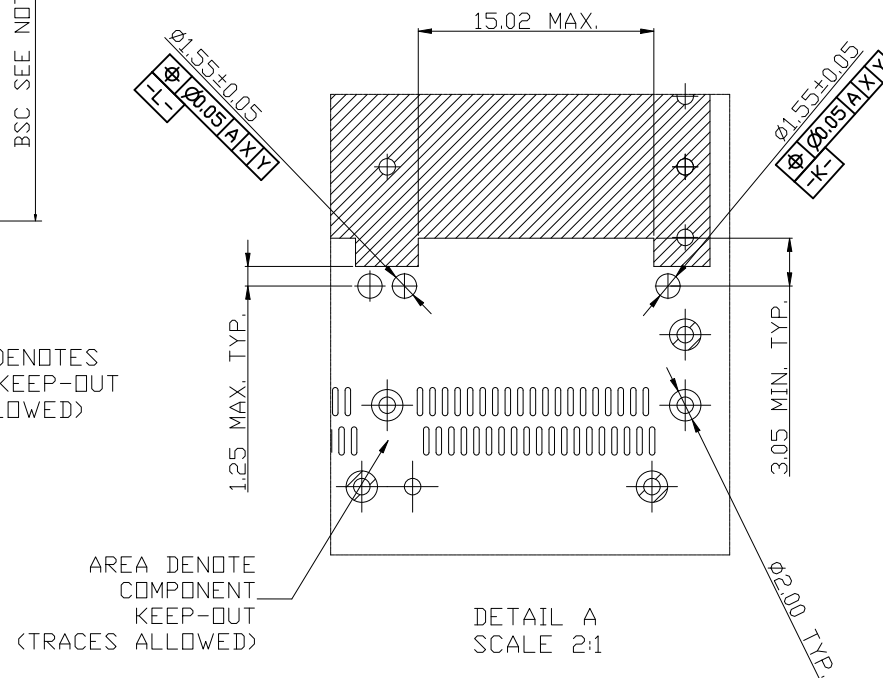

PRELIMINARY

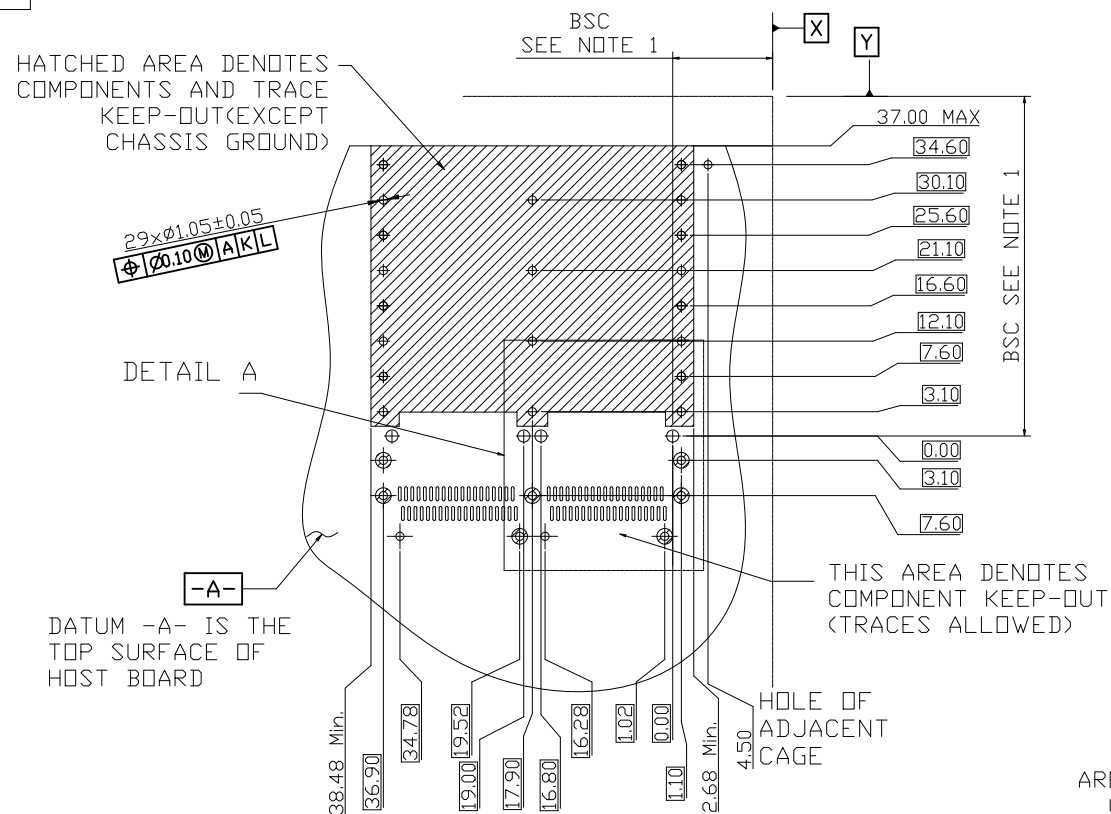

RECOMMENDED PCB LAYOUT FOR BELLY TO BELLY MOUNTING
PCB TOLERANCE: ± 0.05

NOTES:

1. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMERS.
2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER OR TIN)
3. HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 19mm
4. FINISHED HOLE SIZE.

X: ± 1.0	X: ± 3
.X: ± 0.35	.X: ± 2.5
.XX: ± 0.25	.XX: ± 1.5
.XXX: ± 0.100	.XXX: ± 0.5
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT

PART NO.: PQPC12-E000-F1S-0R

TITLE: QSFP112 1X2 CAGE

APPD: RONGZHE GUO 2026.06.22

CHKD: HENGSHAN CHENG 2026.06.22

DRAW: BAIYU DUAN 2026.06.22


LUXSHARE-ICT

CUSTOMER P/N:
N/A

DWG NO:
PQPC12-E000-F1S-0R-000




SCALE	SHEET	REV.
1:1	3/4	A

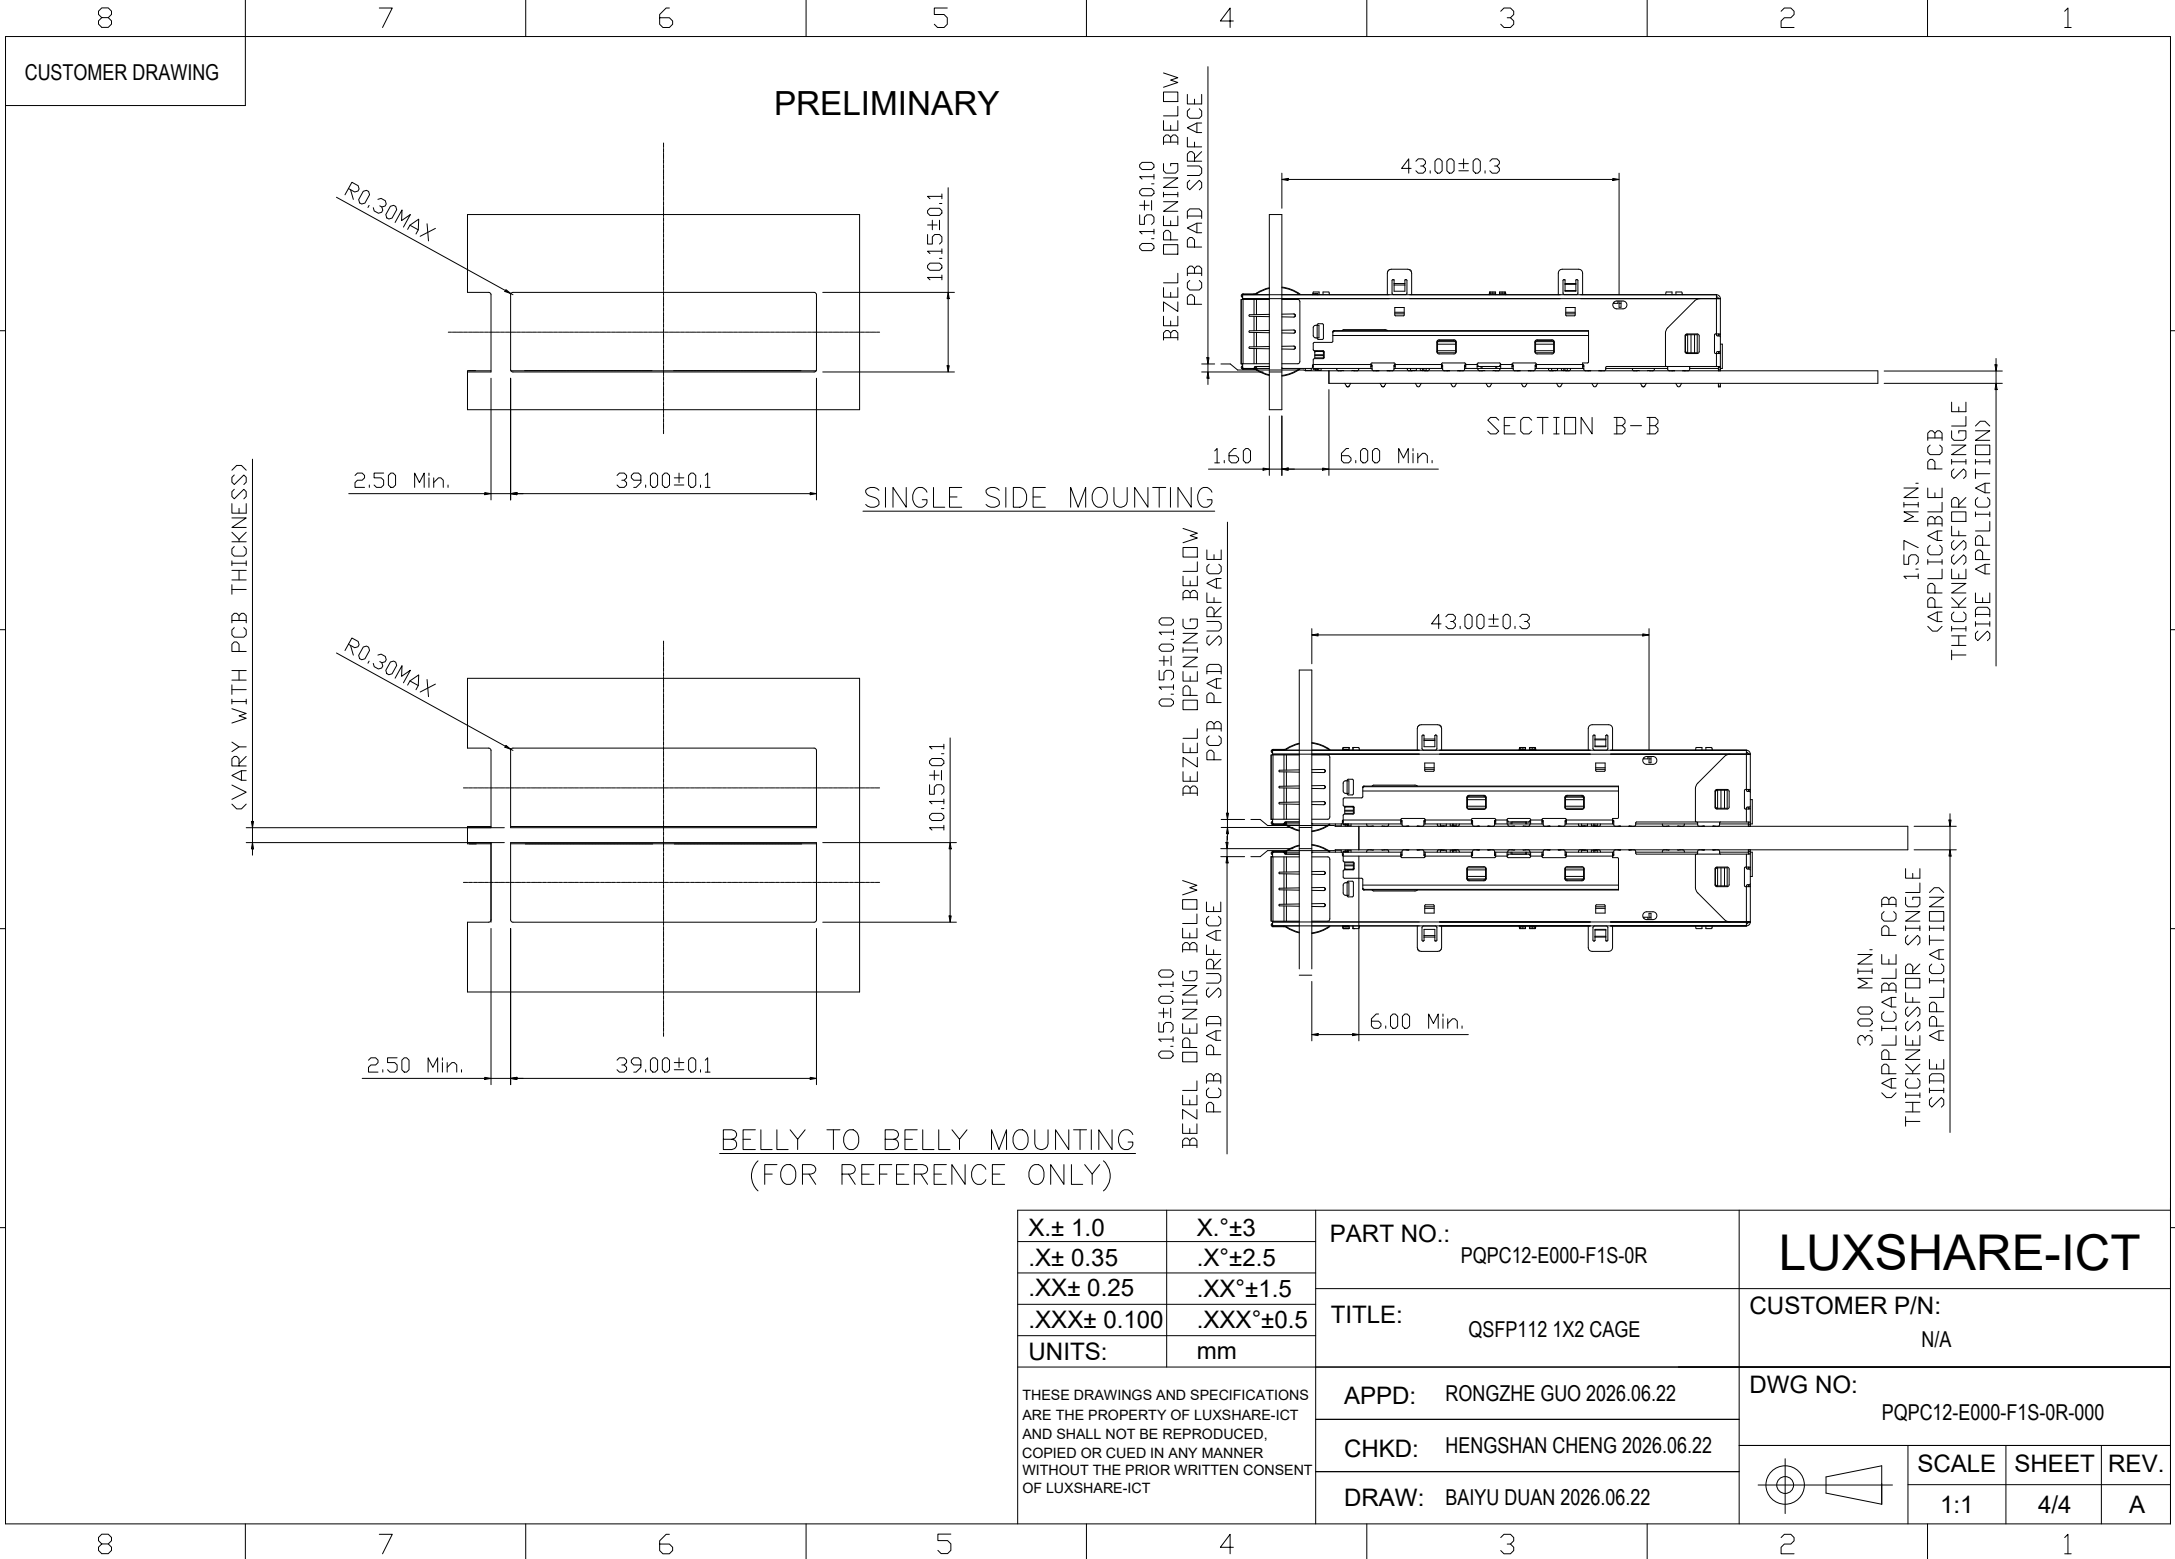

LUXSHARE-ICT

CUSTOMER P/N:
N/A

DWG NO:
PQPC12-E000-F1S-0R-000



SCALE	SHEET	REV.
1:1	4/4	A