

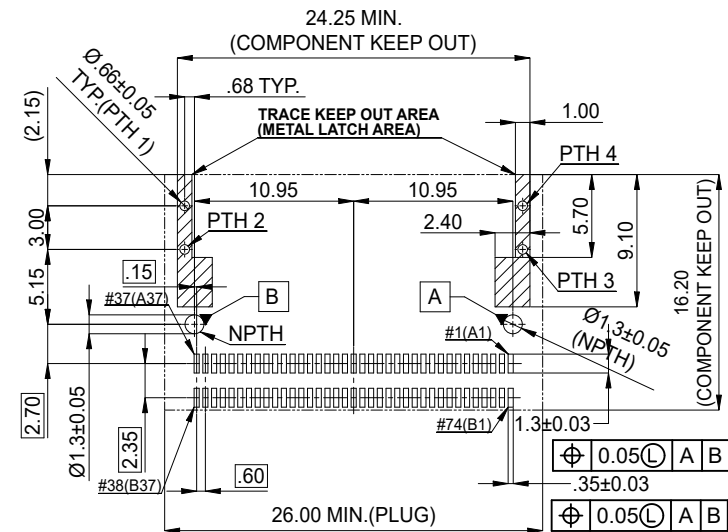
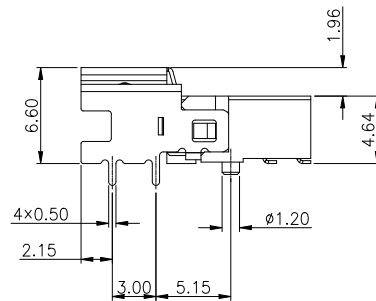
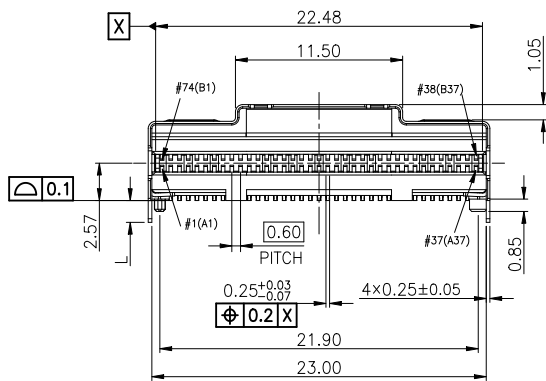
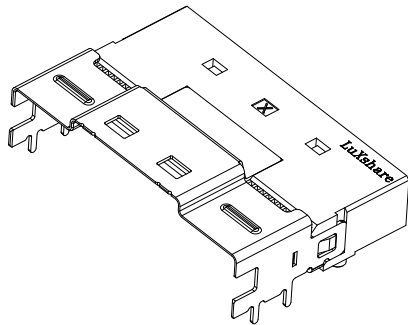


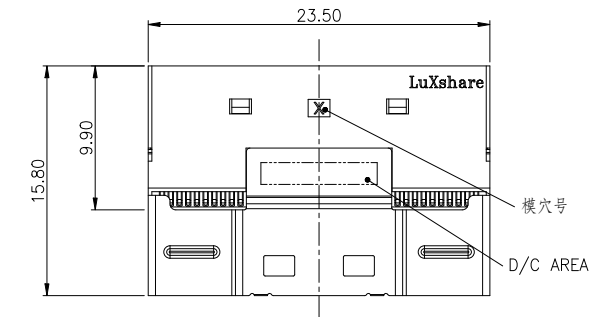


RECOMMENDED PCB LAYOUT
ALL DIMENSIONS TOLERANCE IS 0.05
TOP VIEW

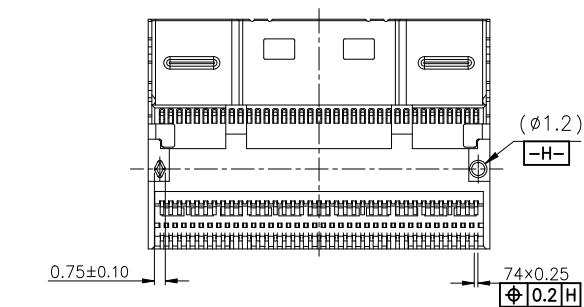

- NOTES:
- 1. MATERIAL:
 - 1.1 HOUSING: LCP, UL94V-0; COLOR: BLACK
 - 1.2 CONTACT: COPPER ALLOY.
 - 1.3 LATCH: STAINLESS STEEL.
 - 2. FINISH:
 - 2.1 CONTACT:
 - 50u" MIN. NICKEL PLATING OVERALL.
 - 15u" or 30u" MIN. GOLD ON CONTACT AREA.
 - 100u" MIN. MATT TIN PLATING ON SOLDER TAIL.
 - 2.2 LATCH:
 - 50u" MIN. NICKEL PLATING ON SOLDER AREA.

3. HALOGEN-FREE PRODUCT P/N:
PSL060-744 * -T * 1- 1 H
- CONTACT AREA PLATING: _____
3: 30u" GOLD ON CONTACT AREA.
7: 15u" GOLD ON CONTACT AREA.
- PACKAGE METHOD:
1: TAPE & REEL
- LATCH PIN LENGTH OPTIONS:
0: L= 1.50mm
1: L= 2.20mm
2: L= 3.00mm
3: L= 4.20mm

X.± 1	X.°±3°	PART NO.: PSL060-744 *-T* 1-1H	LUXSHARETECH			
.X± 0.30	.X°±2°					
.XX± 0.20	.XX°±1°	TITLE: SLIMSAS X8 R/A RECEPTACLE 74 POSITION	CUSTOMER P/N: N/A			
.XXX± 0.10	.XXX°±0.5°					
UNITS:	mm					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARETECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARETECH	APPD: Rongzhe Guo		DWG NO: PSL060-7443-T01-1H-000			
	CHKD: Hengshan Cheng					
	DRAW: Haojin Sun 2026.07.10			SCALE 1:1	SHEET 1/1	REV. A1