



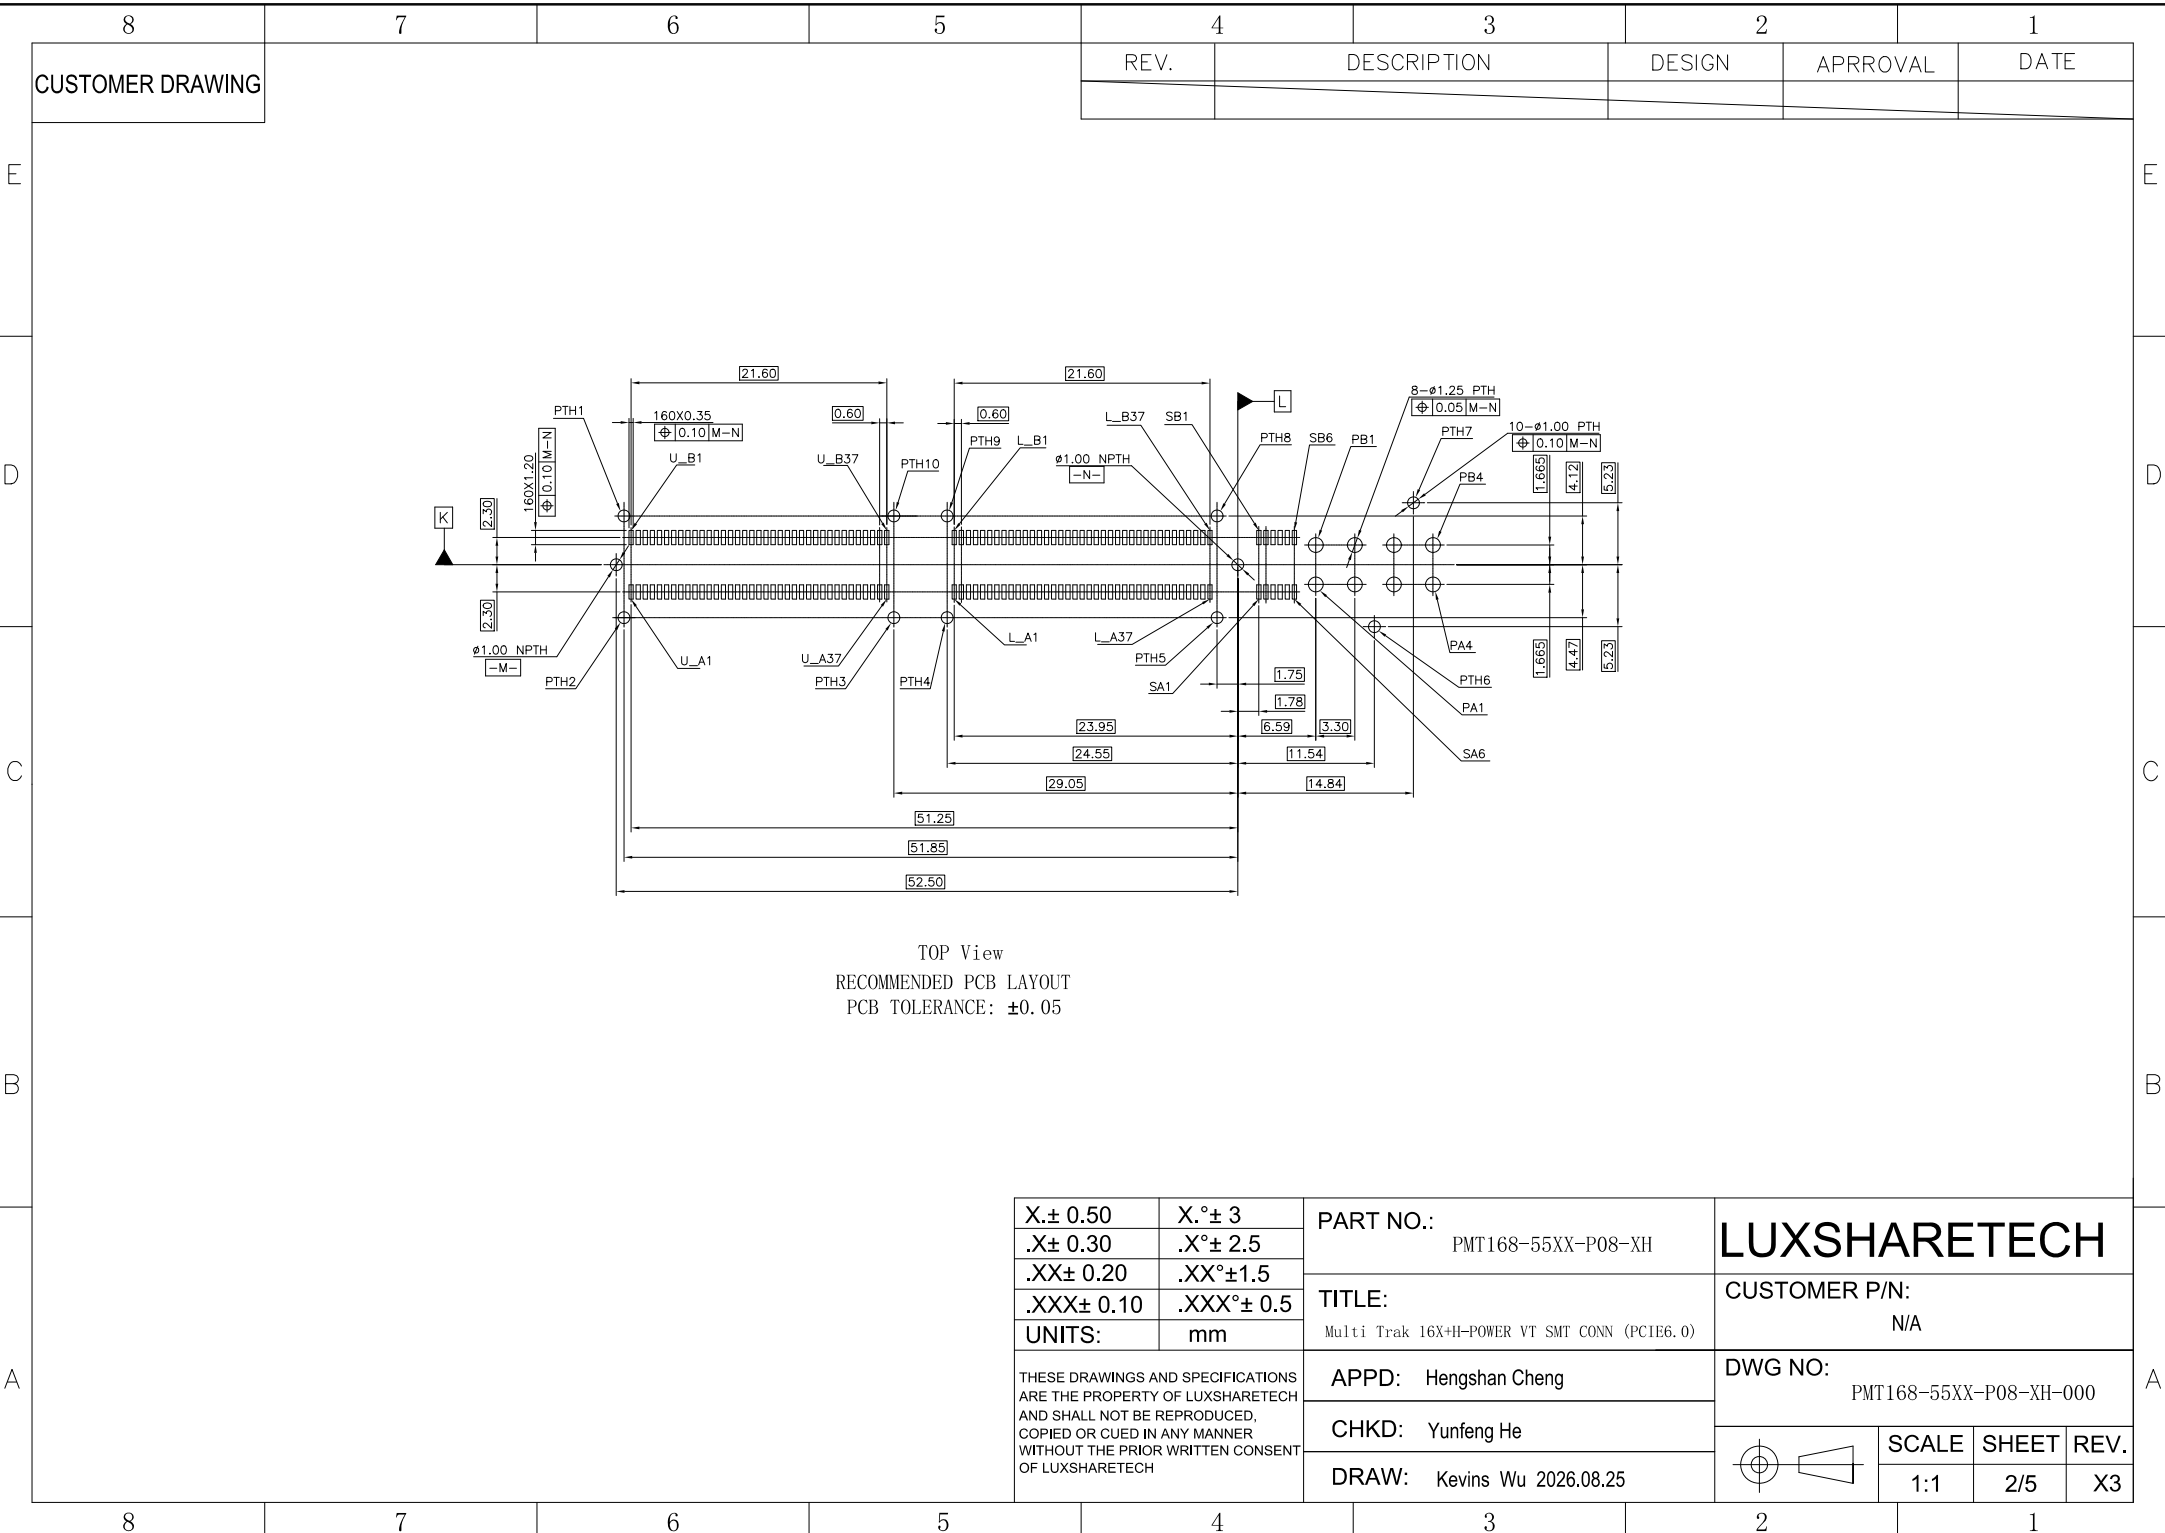


TOP View
RECOMMENDED PCB LAYOUT
PCB TOLERANCE: ±0.05

X.± 0.50	X.°± 3	PART NO.: PMT168-55XX-P08-XH	LUXSHARETECH			
.X± 0.30	.X°± 2.5					
.XX± 0.20	.XX°± 1.5	TITLE: Multi Trak 16X+H-POWER VT SMT CONN (PCIE6.0)	CUSTOMER P/N: N/A			
.XXX± 0.10	.XXX°± 0.5		DWG NO: PMT168-55XX-P08-XH-000			
UNITS:	mm	APPD: Hengshan Cheng		SCALE	SHEET	REV.
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARETECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARETECH		CHKD: Yunfeng He		1:1	2/5	X3
		DRAW: Kevins Wu 2026.08.25				


8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---

8		7		6		5		4		3		2		1	
CUSTOMER DRAWING															
		REV.		DESCRIPTION				DESIGN		APPROVAL		DATE			

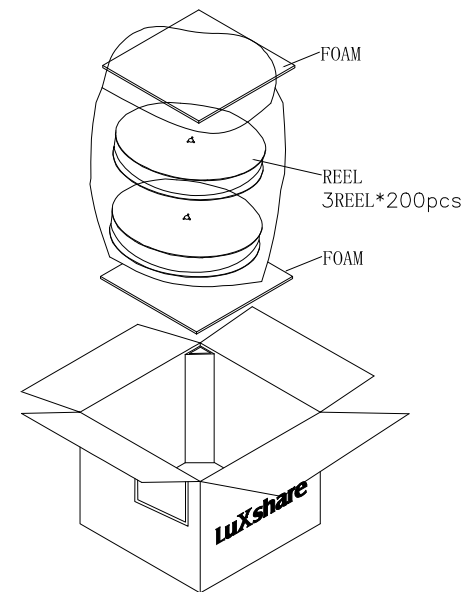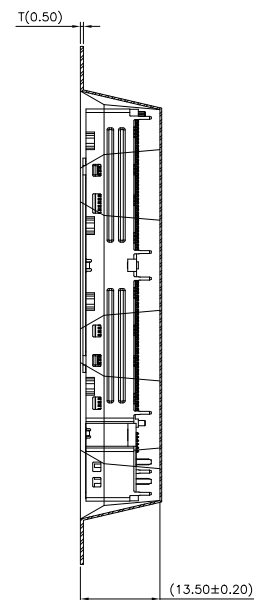


NOTE 2:

1. CARTON SIZE 340L X 340W X 295H
2. PREFER TO AMTA LABELING STANDARD.
3. CARTON CLOSURES MUST BE SEALED WITH TAPE.
4. 600PCS/CARTON.

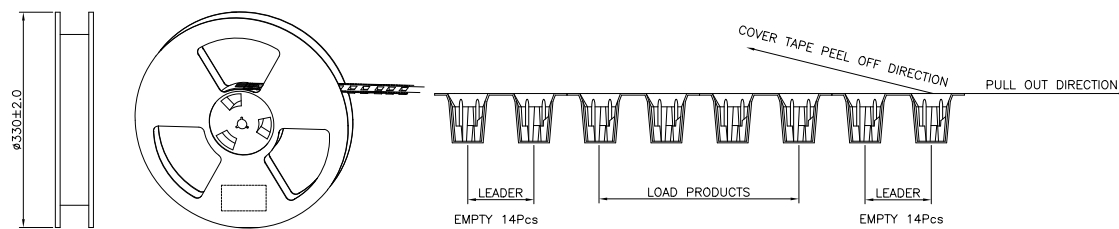

NOTE 1 :

1. MATERIAL
CARRIER TAPE: POLYSTYRENE, BLACK
COVER TAPE: TRANSPARENT POLYSTYRENE
REEL: POLYSTYRENE, Blue.
2. ALL TAPE AND REEL SPECIFICATION FOLLOW EIA-481 STANDARD.
3. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZRDOUS PER DIRECTIVE 2002/95/EC FOR RoHS.

X.± 0.50	X.°± 3	PART NO.: PMT168-55XX-P08-XH	LUXSHARETECH			
.X± 0.30	.X°± 2.5					
.XX± 0.20	.XX°±1.5		TITLE: Multi Trak 16X+H-POWER VT SMT CONN (PCIE6.0)	CUSTOMER P/N: N/A		
.XXX± 0.10	.XXX°± 0.5					
UNITS:	mm					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARETECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARETECH		APPD: Hengshan Cheng	DWG NO: PMT168-55XX-P08-XH-000			
		CHKD: Yunfeng He				
		DRAW: Kevins Wu 2026.08.25		SCALE 1:1	SHEET 5/5	REV. X3