
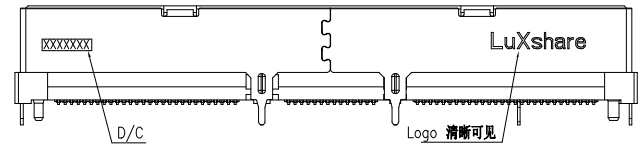
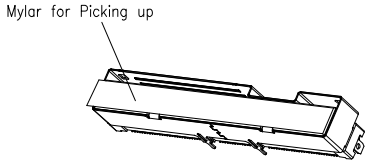
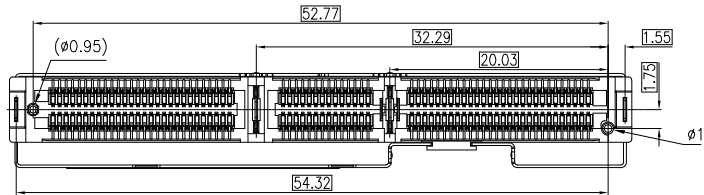
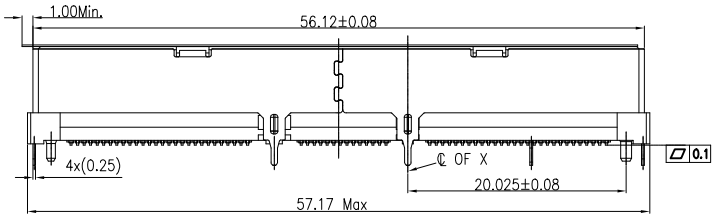

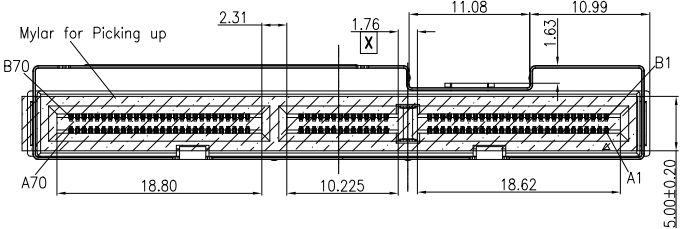


CUSTOMER DRAWING

REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW DESIGN	TENG WANG	Hongji Chen	2024.05.08

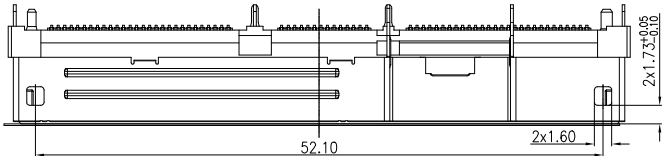

- Notes:
- Material
 - Housing: LCP, UL 94V-0; Color: Black
 - Contact: Copper Alloy
 - Metal Key : Stainless steel
 - Metal Holder: Stainless steel
 - Metal Shell: Stainless steel
 - Finish:
 - Contact: Ni plating overall; Gold plating on contact area see P/N; Sn plating on the solder tail.
 - Metal Key : Ni plating overall
 - Metal Holder : Ni plating overall, Sn plating on the solder tail.
 - Metal shell: Ni plating overall
 - Support CEM PCIE 5.0.
 - This part meets the restriction of hazardous substances in electrical and electronic equipment (ROHS) directive (2011/65/EU)
 - P/N : PGZBA4-5X0X-X08-1H
 - Au30u"
 - 0 WITH LOGO
 - G WITHOUT LOGO
 - Au15u"
 - 0 DIM A=1.87mm
 - 1 DIM A=3.30mm

X.± 0.5	X.°±3°
.X± 0.3	.X°±2.5°
.XX± 0.2	.XX°±1.5°
.XXX± 0.1	.XXX°±0.5°
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARETECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARETECH

PART NO.: See P/N	LUXSHARETECH		
TITLE: GEN Z VT 4C WITH SHELL CONNECTOR.增强版	CUSTOMER P/N: NA		
APPD: Hongji Chen 2024.05.08	DWG NO: PGZBA4-5X0X-X08-1H-01		
CHKD: Hongji Chen 2024.05.08		SCALE	SHEET
DRAW: TENG WANG 2024.05.08		1:1	1/3
		REV.	A1



C

B



	E
--	---

CUSTOMER DRAWING

Pin Geometry pattern for 1C,2C,4C, AND 4C+ CONNECTOR

4C+ CONNECTOR														4C CONNECTOR																											
														2C CONNECTOR																											
														1C CONNECTOR																											
1C CONNECTOR																																									
ROW	Side A							Side B																																	
01	GND							GND																																	
02	SIGNAL							SIGNAL																																	
03	SIGNAL							SIGNAL																																	
04	GND							GND																																	
05	SIGNAL							SIGNAL																																	
06	SIGNAL							SIGNAL																																	
07	GND							GND																																	
08	SIGNAL							SIGNAL																																	
09	SIGNAL							SIGNAL																																	
010	GND							GND																																	
011	SIGNAL							SIGNAL																																	
012	SIGNAL							SIGNAL																																	
013	GND							GND																																	
014	GND							GND																																	
KEY																																									
1	GND							GND																																	
2	SIGNAL							SIGNAL																																	
3	SIGNAL							SIGNAL																																	
4	GND							GND																																	
5	SIGNAL							SIGNAL																																	
6	SIGNAL							SIGNAL																																	
7	GND							GND																																	
8	SIGNAL							SIGNAL																																	
9	SIGNAL							SIGNAL																																	
10	GND							GND																																	
11	SIGNAL							SIGNAL																																	
12	SIGNAL							SIGNAL																																	
13	GND							GND																																	
14	SIGNAL							SIGNAL																																	
15	SIGNAL							SIGNAL																																	
16	GND							GND																																	
17	SIGNAL							SIGNAL																																	
18	SIGNAL							SIGNAL																																	
19	GND							GND																																	
20	SIGNAL							SIGNAL																																	
21	SIGNAL							SIGNAL																																	
22	GND							GND																																	
23	SIGNAL							SIGNAL																																	
24	SIGNAL							SIGNAL																																	
25	GND							GND																																	
26	SIGNAL							SIGNAL																																	
27	SIGNAL							SIGNAL																																	
28	GND							GND																																	
KEY																																									
29	GND							GND																																	
30	SIGNAL							SIGNAL																																	
31	SIGNAL							SIGNAL																																	
32	GND							GND																																	
33	SIGNAL							SIGNAL																																	
34	SIGNAL							SIGNAL																																	
35	GND							GND																																	
36	SIGNAL							SIGNAL																																	
37	SIGNAL							SIGNAL																																	
38	GND							GND																																	
39	SIGNAL							SIGNAL																																	
40	SIGNAL							SIGNAL																																	
41	GND							GND																																	
42	GND							GND																																	
KEY																																									
43	GND							GND																																	
44	SIGNAL							SIGNAL																																	
45	SIGNAL							SIGNAL																																	
46	GND							GND																																	
47	SIGNAL							SIGNAL																																	
48	SIGNAL							SIGNAL																																	
49	GND							GND																																	
50	SIGNAL							SIGNAL																																	
51	SIGNAL							SIGNAL																																	
52	GND							GND																																	
53	SIGNAL							SIGNAL																																	
54	SIGNAL							SIGNAL																																	
55	GND							GND																																	
56	SIGNAL							SIGNAL																																	
57	SIGNAL							SIGNAL																																	
58	GND							GND																																	
59	SIGNAL							SIGNAL																																	
60	SIGNAL							SIGNAL																																	
61	GND							GND																																	
62	SIGNAL							SIGNAL																																	
63	SIGNAL							SIGNAL																																	
64	GND							GND																																	
65	SIGNAL							SIGNAL																																	
66	SIGNAL							SIGNAL																																	
67	GND							GND																																	
68	SIGNAL							SIGNAL																																	
69	SIGNAL							SIGNAL																																	
70	GND							GND																																	