


Internal MiniSAS-HD Connector(24G)

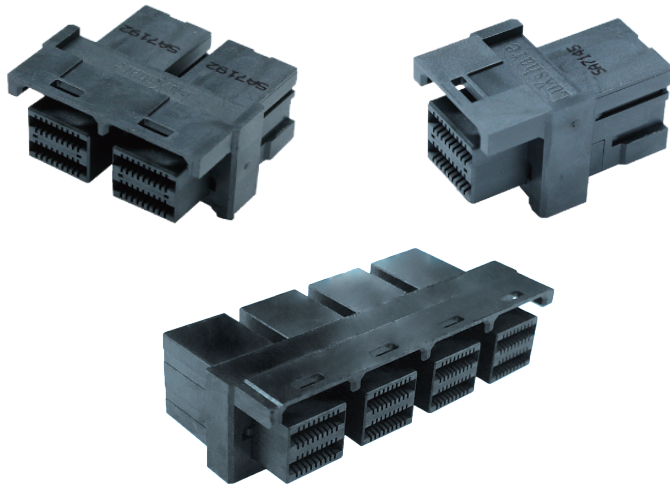

OVERVIEW

MiniSAS-HD High Density connector system is the next generation SAS system that provides faster data rate and more bandwidth. The interface also can be adopted to the SAS and PCIe standards. It provides double the port density interface against the current MiniSAS connectors with 1x1(4x), 1x2(8x) and 1x4(16x) ports available. Luxshare-TECH provides right angle type with Press-Fit application.

Luxshare-TECH's MiniSAS-HD series could support SAS4.0(24Gbps), SAS3.0(12Gbps), PCIe4.0(16Gbps) and PCIe3.0(8Gbps) interconnection together with the corresponding internal cable.

FEATURES & BENEFITS

- ◆ High density high speed
- ◆ 1x1(4x), 1x2(8x) and 1x4(16x) port options, right angle type
- ◆ Provide 4 high speed channel per port
- ◆ 0.75mm contact pitch and 30% smaller than MiniSAS
- ◆ 92Ohm impedance design which can compatible both SAS and PCIe
- ◆ Supports SAS4.0, SAS3.0, PCIe4.0 and PCIe3.0 performance

PRODUCT APPLICATIONS

Data center & Networking Equipment
Servers/Storage Devices
RAID systems
Switches
SAS/SATA HBA interfaces

INDUSTRY STANDARDS

SFF-8643

Internal MiniSAS-HD Connector(24G)

TECHNICAL INFORMATION

MATERIAL

Contact Base Metal: Copper Alloy
Contact Area Finish: Gold over Nickel
Press-Fit Area: Matte Tin over Nickel
Board lock: Stainless steel
Housing: High temperature thermoplastic(UL 94V-0)

ELECTRICAL PERFORMANCE

Voltage: 30V AC(RMS)/DC MAX
Current: 0.5A MAX per contact

ENVIRONMENTAL

Operating temperature : 20°C TO +65°C
Storage temperature : -55°C TO +85°C

Partial PN Table

Product Numbers	Product Description
PMSB36-1301-000-0H	MiniSAS-HD Conn.1x1 24G,R/A,30u" Au,HF
PMSB72-1301-000-0H	MiniSAS-HD Conn.1x2 24G,R/A,30u" Au,HF
PMSBA3-1301-000-0H	MiniSAS-HD Conn.1x4 24G,R/A,30u" Au,HF

MECHANICAL PERFORMANCE

Rated Durability Cycles: 250
Mating Force: 1.66N/pin MAX
Unmating Force: 0.83N/pin MIN

PACKAGING

Tray

SPECIFICATION

ES-11-00-0014